


RECOMMENDED SOLDERING PCB LAYOUT
TOLERANCE(.XX±0.05)

- Note:
1. Material: Stainless steel Thickness 0.1mm
 2. Electroplate:
Matte Sn over all
Nickel underplating over all
 3. Operating Temperature: -20℃~+85℃
 4. Recommended conditions $\varnothing 2.59\text{mm}$


TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	04/24-'14	Design creation			
REV	Date	Description			
DRAFT	Justin Wu	DATE	04/24-'14	RoHS Compatible	
CHECKER	Gabby Weng	DATE	04/24-'14		
APPROVAL	Jacky Lin	DATE	04/24-'14	SHEET	1-2
		SCALE	Not to scale	UNIT	mm
EMI STOP CORP.					
EMISTOP SV-25M			CUS P/N		

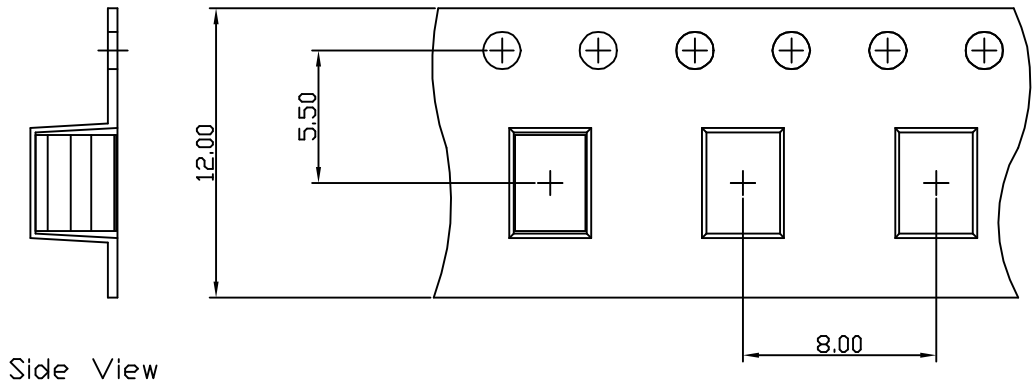


Side View

FEEDING DIRECTION



Front View

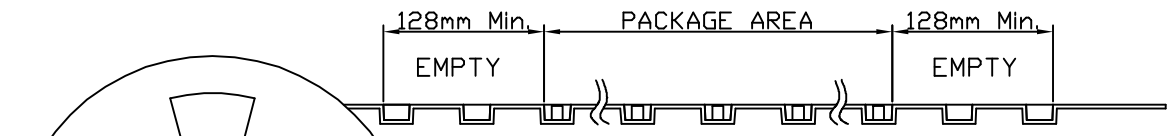


REEL(13")

Package Information:
 1.Quantity Per Reel: 2200PCS
 2.REEL: 13"X 12 mm

00	11/04-'19	Design creation		
REV	Date	Description		
DRAFT	Andy □	DATE	11/04-'19	RoHS Compatible
CHECKER	Justin Wu	DATE	11/04-'19	
APPROVAL	Jacky Lin	DATE	11/04-'19	SHEET 2-2
		SCALE	Not to scale	UNIT mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		


EMI STOP CORP.
 EMI STOP
 EMISTOP SV-25M

CUS P/N