




# EMI SPRING - SQ SERIES


- Anti-hook design
- Stable contact point and resistance

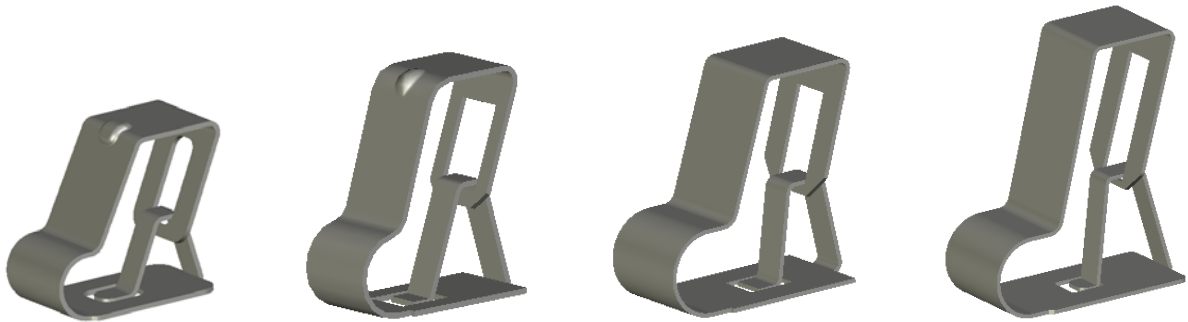

Grounding / EMI / Signal Solution


## Applications

- Antenna Contact
- Grounding Contact
- Signal Transmission



- ← Antenna/PCB
- ← SQ Spring
- ← PCB

## SQ series

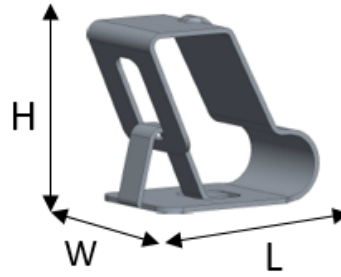

P/N	Plating	Material	L (mm)	W (mm)	H (mm)	Working Height (mm)
SQ-26Q2G	Gold	Copper Alloy	3.40	2.00	2.60	1.70 ~ 2.30
SQ-28G	Gold	Beryllium Copper	2.90	1.80	2.80	1.80 ~ 2.50
SQ-33G	Gold	Beryllium Copper	3.65	2.00	3.30	1.80 ~ 3.00
SQ-37Q1G	Gold	Copper Alloy	4.10	2.00	3.70	2.60 ~ 3.20
SQ-40G	Gold	Beryllium Copper	3.53	1.70	4.05	2.90 ~ 3.60
SQ-46Q2G	Gold	Copper Alloy	4.45	2.60	4.60	3.60 ~ 4.10
SQ-51Q2G	Gold	Copper Alloy	5.00	2.50	5.10	3.80 ~ 4.70
SQ-55G	Gold	Beryllium Copper	5.00	2.65	5.50	3.60 ~ 4.40
SQ-63Q2G	Gold	Copper Alloy	5.35	2.50	6.30	4.00 ~ 5.80

< contact us > +886-2-8911-3450 | [service@emistop.com](mailto:service@emistop.com)