
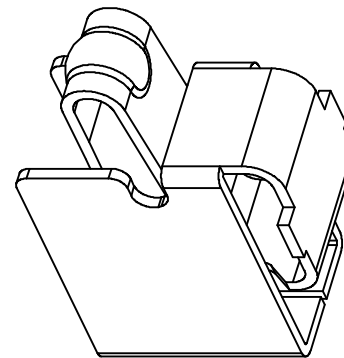


The First Cycle

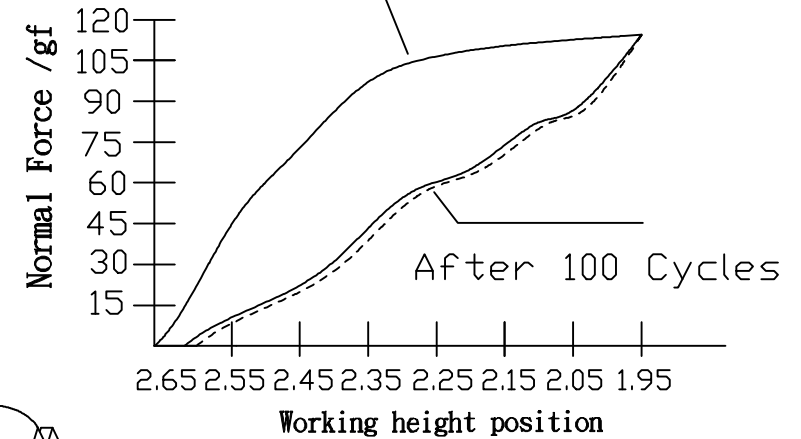

Note:

1. Material: Stainless Steel Thickness 0.08mm
2. Electroplate:  
Au >1u" gold plating on contact area  
Gold Flash on solder area  
Nickel underplating over all
3. Electrical Characteristics:  
3-1 Current Voltage: 12V  
3-2 Current Rate: 3A  
3-3 Contact Resistance: Normal Compression < 50mΩ
4. Working Height of Application: 1.95~2.30 mm
5. Spring Force Tolerance is ±20gf
6. Operating Temperature: -20℃~+85℃

01	05/05-'21	Appearance update	
DRAFT	Hardy Hsieh	DATE	08/16-'19
CHECKER	Justin Wu	DATE	08/16-'19
APPROVAL	Timothy Chen	DATE	08/16-'19
		SHEET	1-2
		SCALE	Not to scale
		UNIT	mm

**RoHS**  
**Compatible**

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	+ 0.1	- 0.15	+ 0.2
30< - ≤120	+ 0.15	- 0.2	+ 0.3
120< - ≤300	+ 0.2	- 0.3	+ 0.5
300<	+ 0.3	- 0.5	+ 0.8
ANGLES	+ 2.5°		

**EMI STOP CORP.**  
EMI STOP  
EMISTOP  
SQT-26Q1G  
CUS P/N