

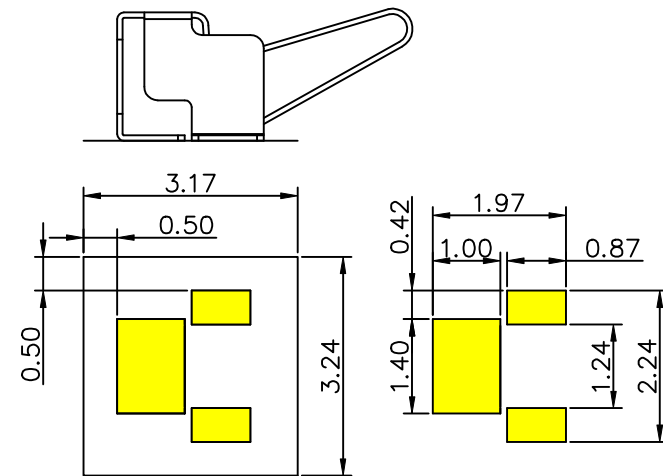


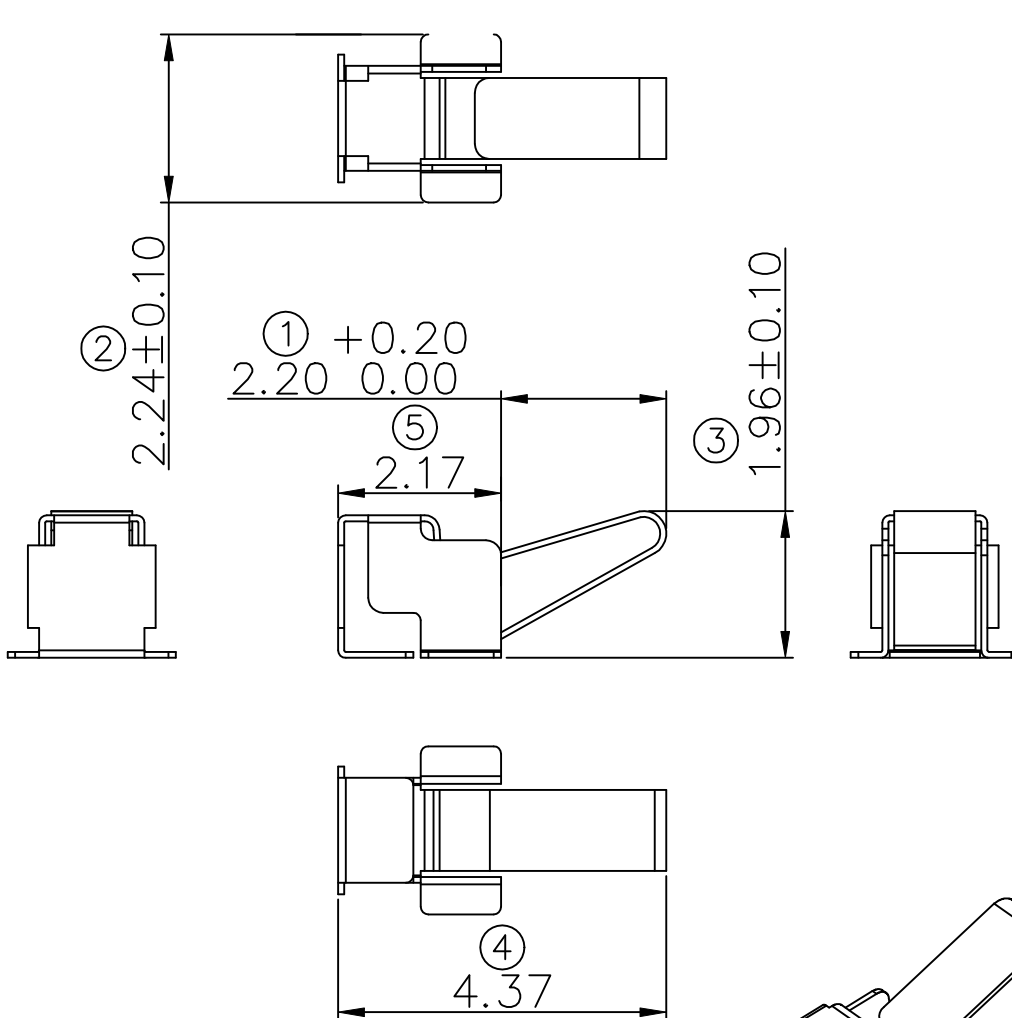

RECOMMENDED SOLDERING PCB LAYOUT
TOLERANCE(.XX±0.05)



Note:

1. Material: Stainless Steel Thickness 0.08 mm
2. Electroplate: Nickel underplating over all, Gold Flash over all.
3. Electrical Characteristics:
 - a. Current Voltage: 12V
 - b. Current Rate: 3A
 - c. Contact Resistance; Normal Compression <50mΩ
4. Working Height of Application: 0.30~0.50 mm
5. Spring Force Tolerance is ±20gf
6. Operating Temperature: -20°C~+85°C



TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

01	2022-09-02	Design Creation			
DRAFT	Peter Ting	DATE	2022-09-02	RoHS Compatible	
CHECKER	Justin Wu	DATE	2022-09-02		
APPROVAL	Timothy Chen	DATE	2022-09-02	SHEET	1-2
				SCALE	Not to scale
				UNIT	mm
					☉
EMI STOP CORP.					
EMI STOP					
EMISTOP P/N				CUS P/N	
JC-442022Q2G					