

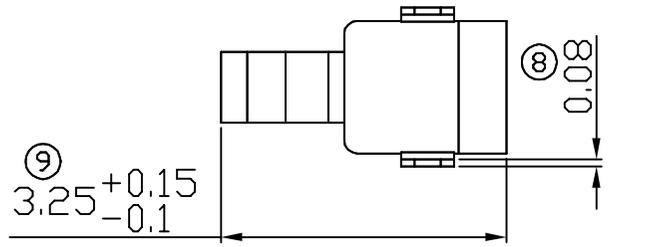


RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

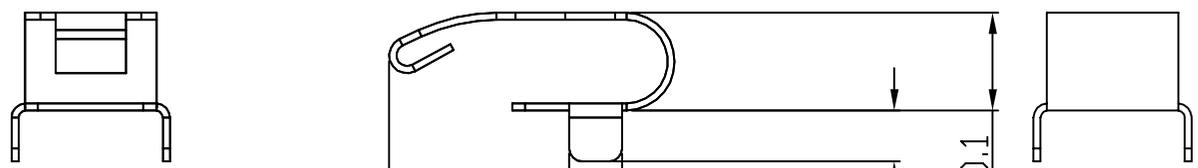

- Note:
- Material: Copper Alloy Thickness 0.08mm
 - Electroplate:
Au >1u" on contact area
Au >1u" on solder area
Nickel underplating over all
 - Electrical Characteristics:
3-1 Current Voltage: 12V
3-2 Current Rate: 3A
3-3 Contact Resistance: Normal Compression<30mΩ
 - Working Range of Application: 0.30~0.50 mm
 - Spring Force Tolerance is ±20gf
 - Operating Temperature: -20℃~+85℃

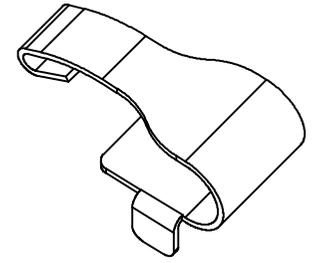

00	03/24-'16	Design creation	
REV	Date	Description	
DRAFT	Danny Liao	DATE	03/24-'16
CHECKER	Justin Wu	DATE	03/24-'16
APPROVAL	Jacky Lin	DATE	03/24-'16
		SHEET	SCALE
		1-2	Not to scale
		UNIT	mm
			⊕

RoHS
Compatible

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30< - ≤120	±0.15	0.20	0.30
120< - ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

EMI STOP CORP.

EMISTOP
JC-333311G

CUS P/N