

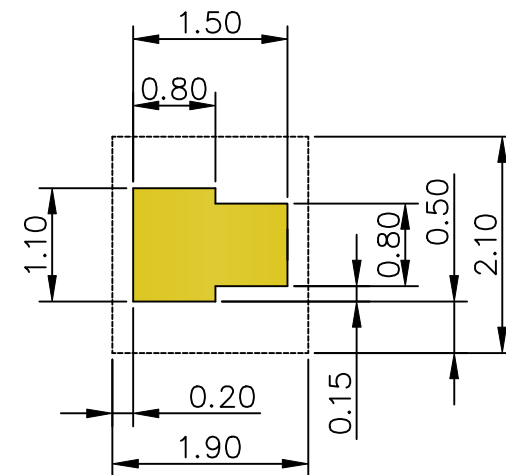

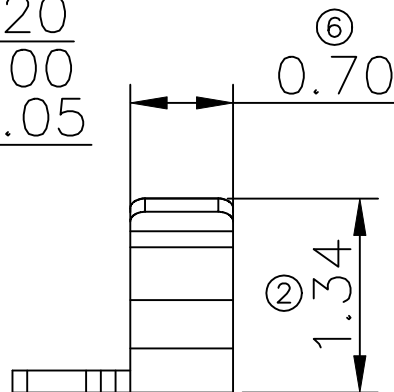
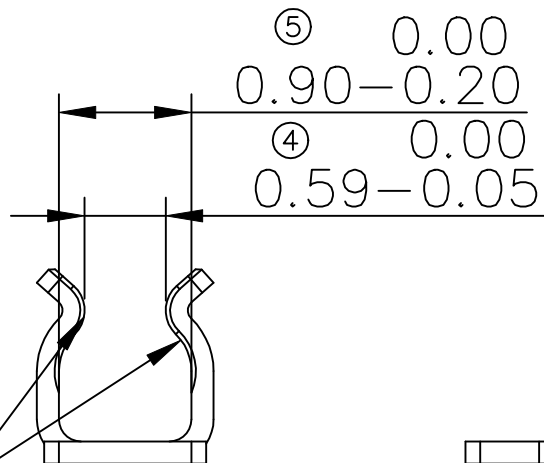


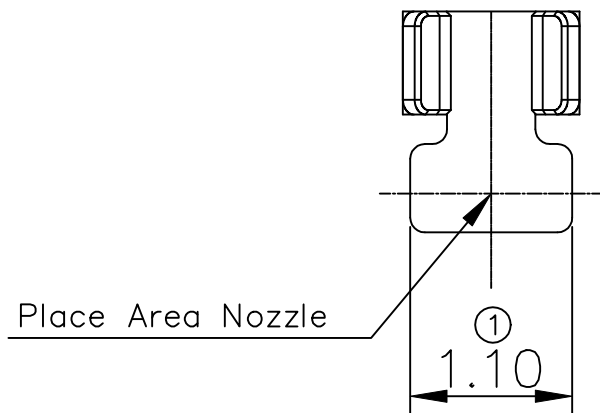

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

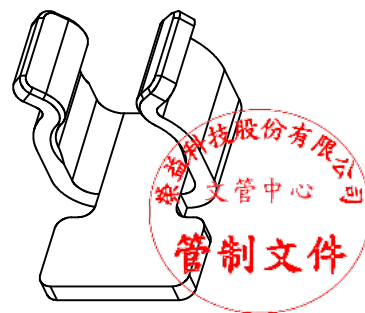

01	2022-04-13	Update drawings			
DRAFT	Peter Ting	DATE	2022-04-13	RoHS Compatible	
CHECKER	Justin Wu	DATE	2022-04-13		
APPROVAL	Timothy Chen	DATE	2022-04-13	SHEET	1-2
		SCALE	Not to scale	UNIT	mm

Note:

1. Material: Stainless Steel Thickness 0.15 mm
2. Electroplate: Nickel underplating over all, Matte Sn over all.
3. Operating Temperature: -20°C~+85°C
4. Recommended conditions Ø0.64~0.81mm

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		



EMI STOP CORP.

EMISTOP P/N
SV-08A2M

CUS P/N