

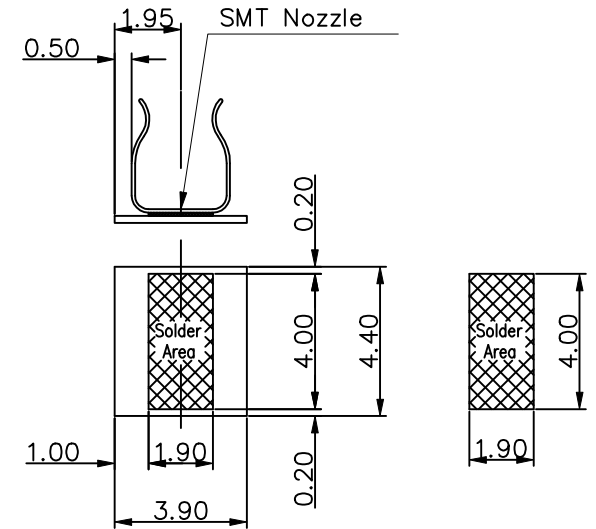
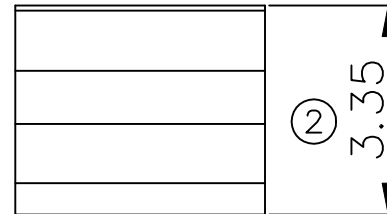


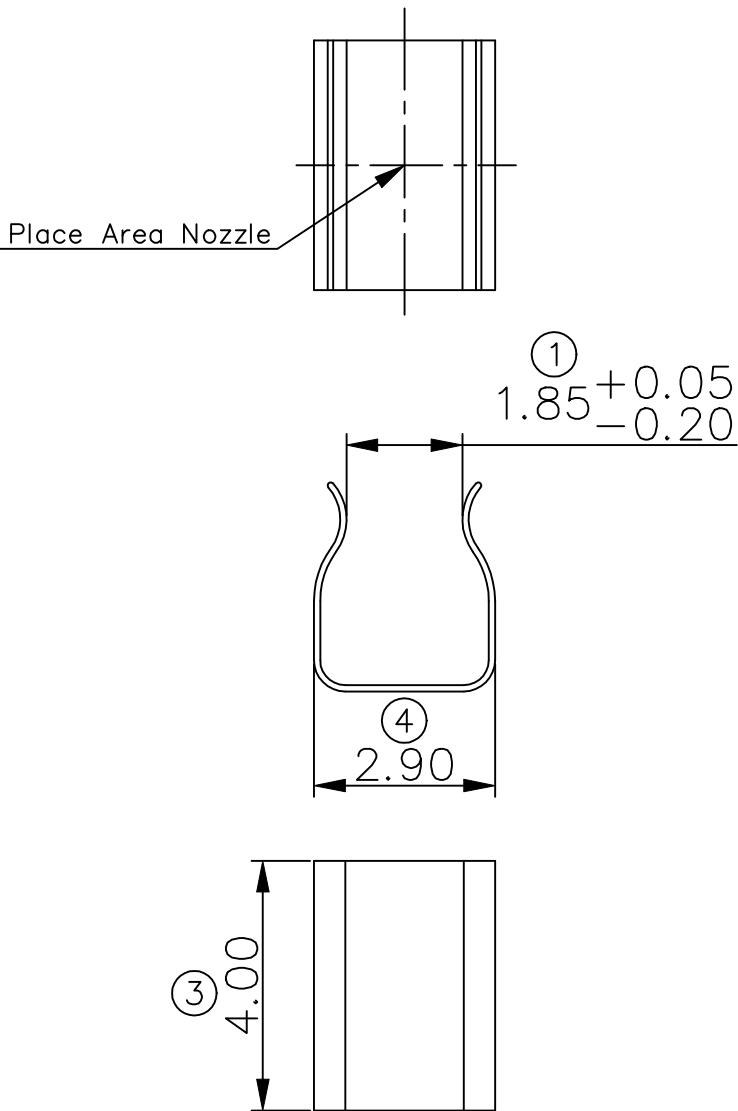

RECOMMENDED SOLDERING PCB LAYOUT
TOLERANCE(.XX±0.05)



Note:

1. Material: Stainless Steel Thickness 0.10 mm
2. Electroplate: Nickel underplating over all, Matte Sn over all.
3. Operating Temperature: -20°C~+85°C
4. Recommended conditions Ø2.59mm



02	2022-11-24	Control critical dimensions			
DRAFT	Peter Ting	DATE	2022-11-24	RoHS Compatible	
CHECKER	Justin Wu	DATE	2022-11-24		
APPROVAL	Timothy Chen	DATE	2022-11-25	SHEET	1-2
		SCALE	Not to scale	UNIT	mm

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		



EMI STOP CORP.

EMISTOP P/N
SV-25M

CUS P/N